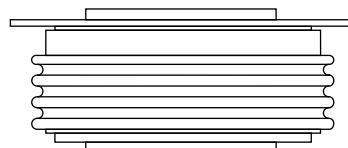


## Standard Recovery Diodes (Hockey PUK Version), 2060A

### FEATURES

- Wide current range
- High voltage ratings up to 4500V
- High surge current capabilities
- Diffused junction
- Hockey PUK version
- Case style DO-220AC(K-PUK), Nell's D-type Capsule
- Lead (Pb)-free



DO-200AC(K-PUK)

(Nell's D-type Capsule )

### TYPICAL APPLICATIONS

- Converters
- Power supplies
- Machine tool controls
- High power drives
- Medium traction applications

PRODUCT SUMMARY	
$I_{F(AV)}$	2060A

MAJOR RATINGS AND CHARACTERISTICS			
PARAMETER	TEST CONDITIONS	VALUES	UNIT
$I_{F(AV)}$		2060	A
	$T_{hs}$	55	°C
$I_{F(RMS)}$		3750	A
	$T_{hs}$	25	°C
$I_{FSM}$	50 HZ	20000	A
	60 HZ	20940	
$I^2t$	50 HZ	2000	$kA^2s$
	60 HZ	1820	
$V_{RRM}$		2600 to 4500	V
$T_J$	Typical	-40 to 150	°C

### ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS				
TYPE NUMBER	VOLTAGE CODE	$V_{RRM}$ , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	$V_{RSM}$ , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	$I_{RRM}$ , MAXIMUM AT $T_J = T_{J\ MAX}$ mA
D2060D	26	2600	2700	70
	30	3000	3100	
	36	3600	3700	
	40	4000	4100	
	45	4500	4600	

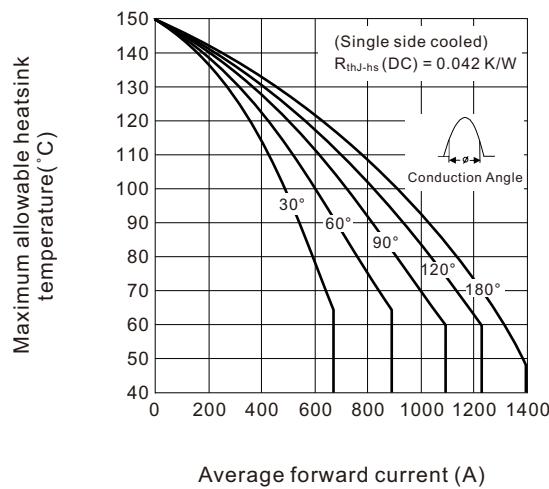
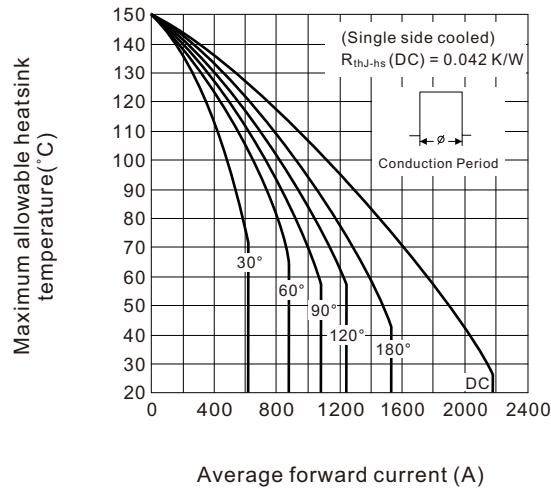
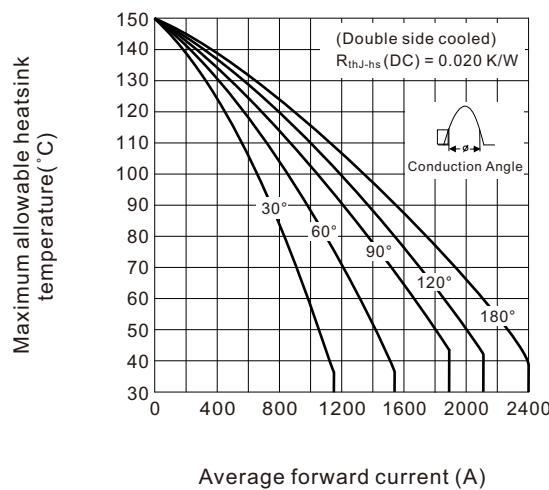
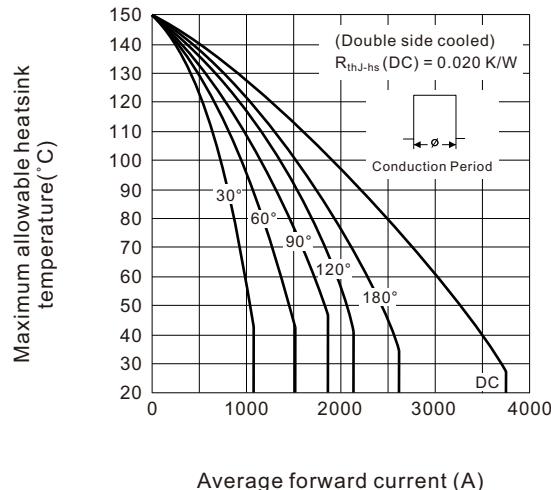
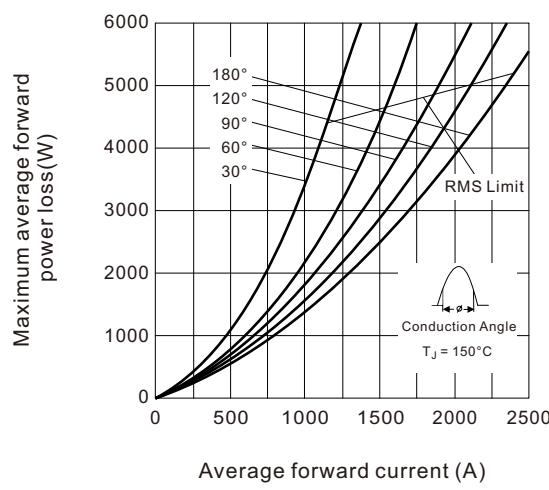
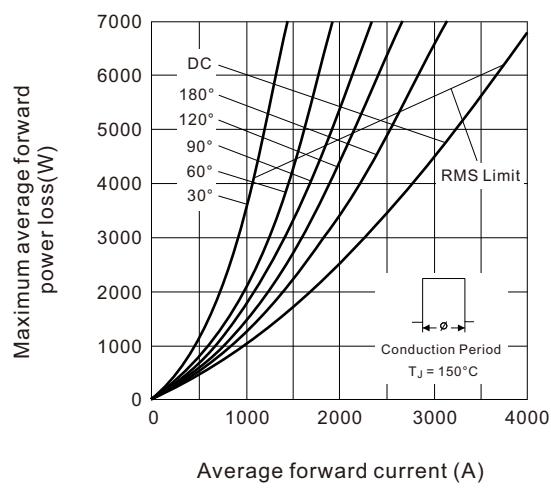
FORWARD CONDUCTION							
PARAMETER	SYMBOL	TEST CONDITIONS			VALUES	UNIT	
Maximum average forward current at heatsink temperature	$I_{F(AV)}$	180° conduction, half sine wave Double side (single side) cooled			2060(1000)	A	
					55(85)	°C	
Maximum RMS forward current	$I_{F(RMS)}$	25°C heatsink temperature double side cooled			3750	A	
Maximum peak, one cycle non-repetitive surge current	$I_{FSM}$	$t = 10ms$	No voltage reapplied	Sinusoidal half wave, initial $T_J = T_J$ maximum	20000	A	
		$t = 8.3ms$			20940		
		$t = 10ms$	50% $V_{RRM}$ reapplied		16800		
		$t = 8.3ms$			17590		
Maximum $I^2t$ for fusing	$I^2t$	$t = 10ms$	No voltage reapplied	Sinusoidal half wave, initial $T_J = T_J$ maximum	2000	$kA^2s$	
		$t = 8.3ms$			1820		
		$t = 10ms$	50% $V_{RRM}$ reapplied		1411		
		$t = 8.3ms$			1284		
Maximum $I^2\sqrt{t}$ for fusing	$I^2\sqrt{t}$	$t = 0.1$ to 10 ms, no voltage reapplied			20000	$kA^2\sqrt{s}$	
Low level value of threshold voltage	$V_{F(TO)1}$	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$ , $T_J = T_J$ maximum			0.88	V	
High level value of threshold voltage	$V_{F(TO)2}$	$(I > \pi \times I_{F(AV)})$ , $T_J = T_J$ maximum			1.00		
Low level value of forward slope resistance	$r_{t1}$	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$ , $T_J = T_J$ maximum			0.30	$m\Omega$	
High level value of forward slope resistance	$r_{t2}$	$(I > \pi \times I_{F(AV)})$ , $T_J = T_J$ maximum			0.27		
Maximum forward voltage drop	$V_{FM}$	$I_{pk} = 4000A$ , $T_J = T_J$ maximum, $t_p = 10$ ms sinusoidal wave			2.15	V	

THERMAL AND MECHANICAL SPECIFICATIONS						
PARAMETER	SYMBOL	TEST CONDITIONS			VALUES	UNIT
Maximum junction operating temperature range	$T_J$				-40 to 150	°C
Maximum storage temperature range	$T_{stg}$				-55 to 200	
Maximum thermal resistance, junction to heatsink	$R_{thJ-hs}$	DC operation single side cooled			0.042	K/W
		DC operation double side cooled			0.020	
Mounting force, ±10%					22250 (2250)	N (kg)
Approximate weight					425	g
Case style		TO-200AC (K-PUK), Nell's D-type Capsule				

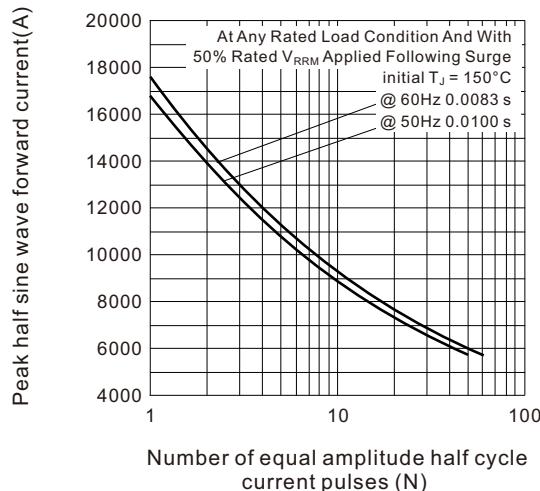
△ $R_{thJc}$ CONDUCTION						
CONDUCTION ANGEL	SINUSOIDAL CONDUCTION		RECTANGULAR CONDUCTION		TEST CONDUCTIONS	UNITS
	SINGLE SIDE	DOUBLE SIDE	SINGLE SIDE	DOUBLE SIDE		
180°	0.002	0.002	0.001	0.001	$T_J = T_J$ maximum	K/W
120°	0.002	0.002	0.002	0.002		
90°	0.003	0.003	0.003	0.003		
60°	0.004	0.004	0.004	0.004		
30°	0.007	0.007	0.007	0.007		

**Note**

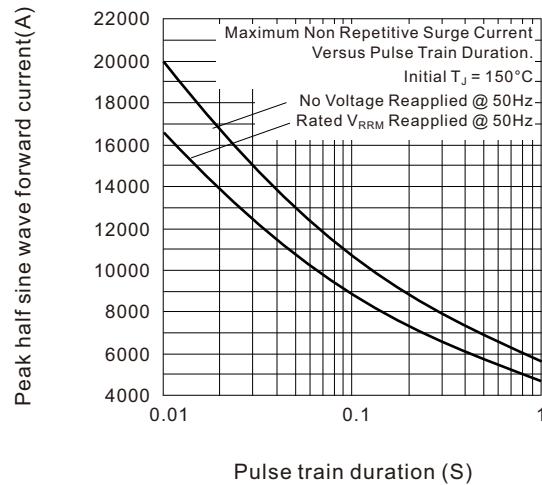
- The table above shows the increment of thermal resistance  $R_{thJ-hs}$  when devices operate at different conduction angles than DC

**Fig.1 Current ratings characteristics**

**Fig.2 Current ratings characteristics**

**Fig.3 Current ratings characteristics**

**Fig.4 Current ratings characteristics**

**Fig.5 Forward power loss characteristics**

**Fig.6 Forward power loss characteristics**


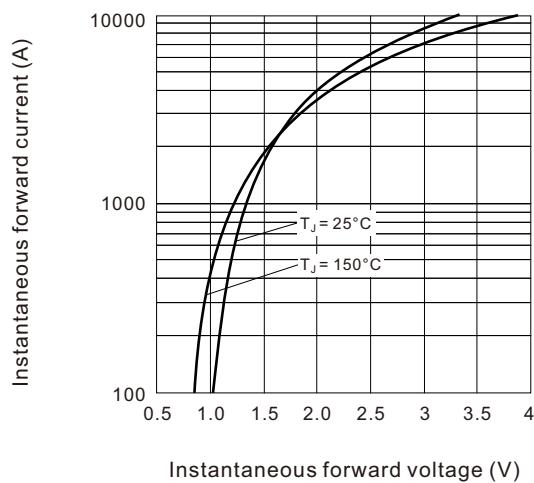
**Fig.7 Maximum non-repetitive surge current single and double side cooled**



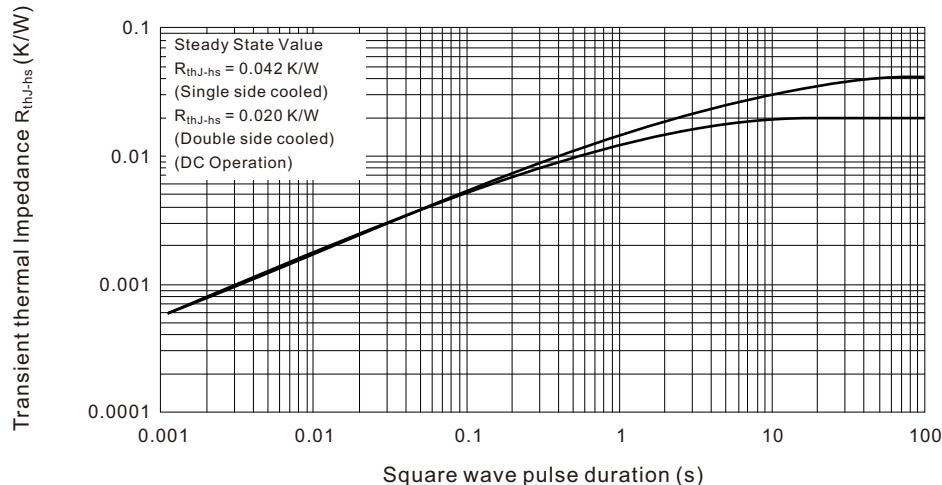
**Fig.8 Maximum non-repetitive surge current single and double side cooled**



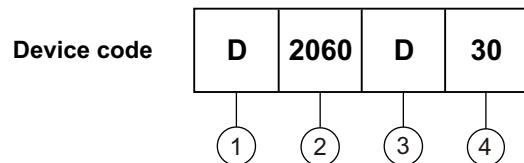
**Fig.9 Forward voltage drop characteristics**



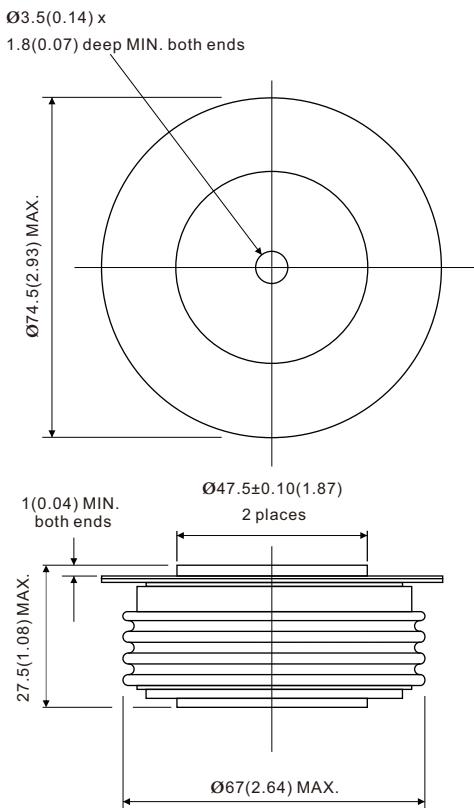
**Fig.10 Thermal Impedance  $R_{thJ-hs}$  characteristics**



## ORDERING INFORMATION TABLE



- 1 - "D" for standard recovery diode
- 2 - Maximum average forward current, "2060" for 2060A
- 3 - Case style : "D" for Nell's D-type Capsule, DO-200AC (K-PUK)
- 4 - Voltage code, code x 100 = V<sub>RRM</sub>

**DO-220AC (K-PUK), Nell's D-type Capsule**


All dimensions in millimeters (inches)

K  
A